



- Stator terminal box  
M63x1,5

- Grease Inlet
- Grease outlet
- Drain hole

— Grounding for leads 25-185 mm<sup>2</sup> / 3AWG-350MCM

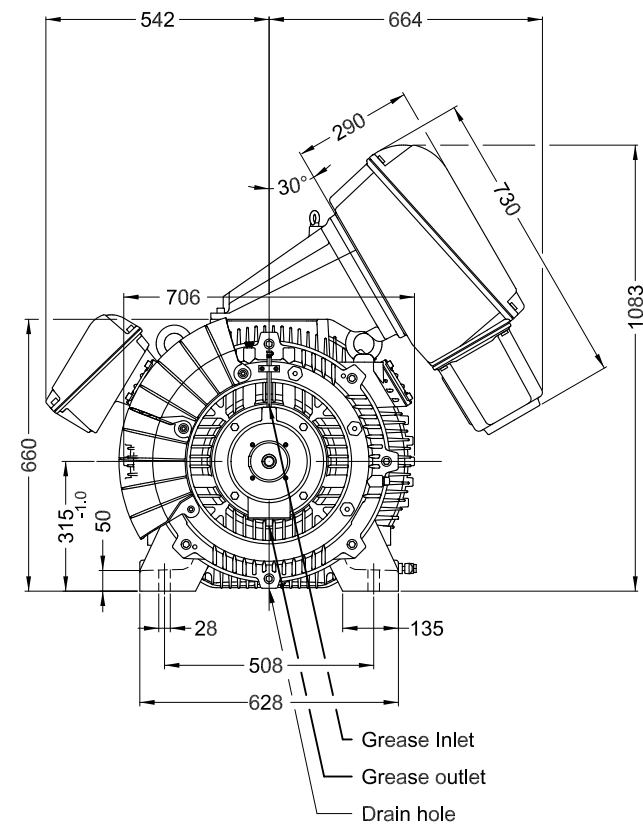

- Grease Inlet
- Grease outlet
- Drain hole

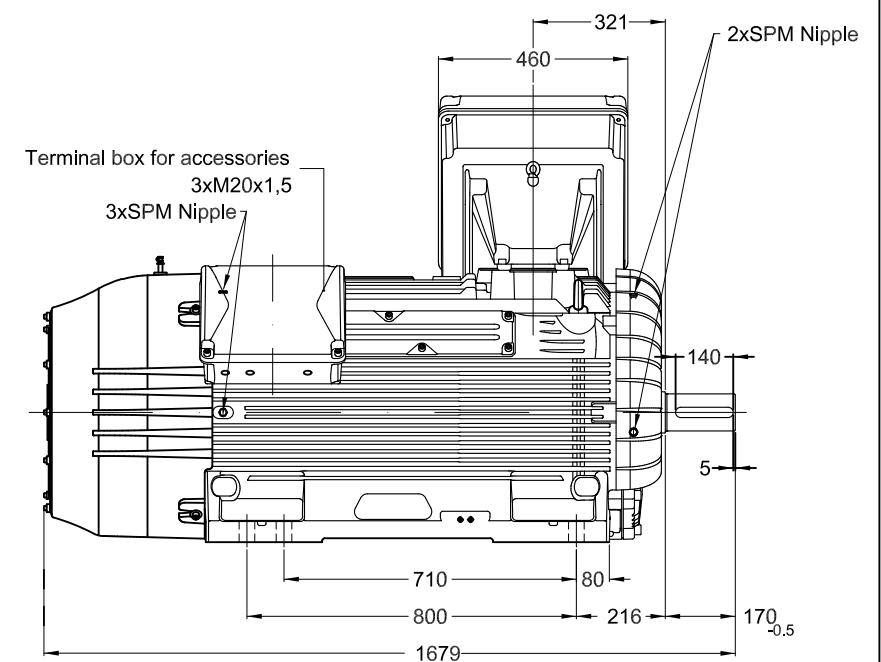



Terminal box for accessories  
3xM20x1,5  
3xSPM Nipple

200 kW	04 Poles	50 Hz	6000 V	A
--------	----------	-------	--------	---

		1:18
--	--	------

			PIRWUSER				00
ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER

EXECUTED	PIRWUSER		THREE PH. MOTOR W50 HAZARDOUS AREA	PREVIEW		
CHECKED			FRAME 315H/G IP55 TEFC	WDD	00	
RELEASED						
REL. DATE		WMO	Jaraguá do Sul	Product Engineering	SHEET	1 / 1

DE roller bearing
SPM studs
NDE endshield with electrically insulated bearing hub (HGF)
Color RAL 5009
Painting plan 214P
Mounting B3R(E)

